



1.45 Katherm NK - Natural convection

Technical data


Katherm NK 182 dimensions




cross-section through 92mm deep duct - unit shown with roll-up grille




cross-section through 120mm deep duct - unit shown with raised floor height adjustment feet and linear grille



cross-section through 150mm deep duct - unit shown with raised floor height adjustment feet and roll-up grille




cross-section through 200mm deep duct - unit shown with linear grille

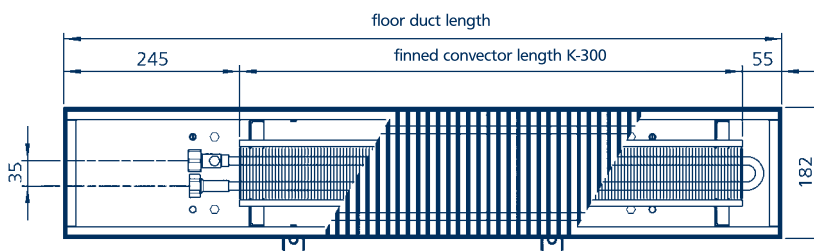


plan view - unit shown with roll-up grille

non-standard (MP) Katherm NK 182 can be manufactured in any length up to a single unit length of 5000 mm.

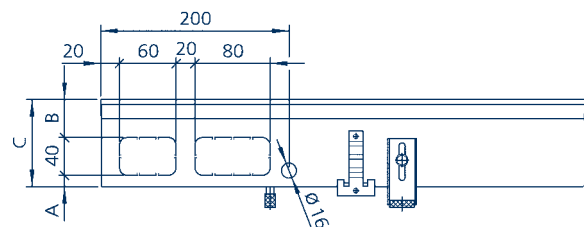

side view of 92mm deep duct showing pipe openings



end view of 92mm deep duct showing stamped pipe opening

Katherm NK 182 dimensions

Overall frame width	[mm]	182			
Duct width	[mm]	151			
Grille width	[mm]	170			
Duct length	[mm]	850-5000 (please state when ordering)			
Convector height	[mm]	50			
Convector depth	[mm]	70			
Finned convector length	[mm]	K - 300			
Connection, Eurokonus		1/2", same end, left or right			
	A [mm]	12	30	50	60
	B [mm]	40	50	60	100
Duct height	C [mm]	92	120	150	200
Max. adjustment height	D [mm]	129	157	187	237